

USA.



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed


Dated 30 January 2004

THIS PAGE BLANK (USPTO)



7/77

Statement of inventorship and of right to grant of a patent

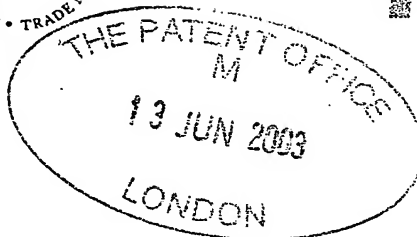

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

P016713GB

2. Patent application number
(if you know it)

0313770.0

13 JUN 2003

3. Full name of the or of each applicant

ARM Limited

4. Title of the invention

Instruction Encoding Within A Data Processing Apparatus Having Multiple Instruction Sets

5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent

By Virtue of Employment

6. How many, if any, additional Patents Forms 7/77 are attached to this form?
(see note (c))

0

7.

I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.

Signature

DY-C

Date 13 June 2003

D Young & Co (Agents for the Applicants)

8. Name and daytime telephone number of person to contact in the United Kingdom

Nigel Robinson

023 8071 9500

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Surname: SEAL

First Names: David, James

14 High Street
Cherry Hinton
Cambridge
CB1 9HZ

Patents ADP number (if you know it): 6254312002

Surname: NEVILL

First Names: Edward Colles

Holly House
16 High Street
Hemingford Grey
Huntingdon
PE28 9DR

Patents ADP number (if you know it): 6577464002

Surname: _____

First Names: _____

Patents ADP number (if you know it): _____

Reminder

Have you signed the form?



16JUN03 12:15:01 D02246
POL/7700.00-0313770.0

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

P016713GB

2. Patent application number

(The Patent Office will fill in this part)

0313770.0

13 JUN 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ARM Limited
110 Fulbourn Road
Cherry Hinton
Cambridge
CB1 9NJ, United Kingdom

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

7498124002

4. Title of the invention

Instruction Encoding Within A Data Processor Apparatus Having Multiple Instruction Sets

5. Name of your agent (*if you have one*)

D Young & Co

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

21 New Fetter Lane
London
EC4A 1DA

Patents ADP number (*if you know it*)

59006

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form 0

Description 14 /

Claim(s) 6 /

Abstract 1 / *W*

Drawing(s) 7 + 7 /

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 3 /

Request for preliminary examination and search (Patents Form 9/77) 1 /

Request for substantive examination (Patents Form 10/77) 0

Any other documents 0
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

DY & Co

Date 13 June 2003

D Young & Co (Agents for the Applicants)

12. Name and daytime telephone number of person to contact in the United Kingdom Nigel Robinson 023 8071 9500

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
b) Write your answers in capital letters using black ink or you may type them.
c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
e) Once you have filled in the form you must remember to sign and date it.
f) For details of the fee and ways to pay please contact the Patent Office.

INSTRUCTION ENCODING WITHIN A DATA PROCESSING APPARATUS
HAVING MULTIPLE INSTRUCTION SETS

This invention relates to the field of data processing systems. More particularly, this invention relates to data processing systems having multiple instruction sets and the way in which such multiple instruction sets may be encoded.

It is known to provide data processing systems with multiple instruction sets. An example of such data processing systems are processor cores produced by ARM Limited of Cambridge, England which support both the ARM and Thumb instruction sets. The ARM instruction set is a 32-bit instruction set and the Thumb instruction set is a 16-bit instruction set. Whilst data processing systems supporting multiple instruction sets allow an advantageous degree of flexibility in the way which program operations may be represented and can yield advantages such as improved code density, there is typically an increase in the amount of hardware needed to support the multiple instruction sets.

Viewed from one aspect the present invention provides apparatus for processing data, said apparatus comprising

data processing logic operable to perform data processing operations; and
an instruction decoder operable to decode program instructions specifying data processing operations to be performed by said data processing logic and to control said data processing logic to perform said data processing operations; wherein

said instruction decoder is operable in a first mode in which program instructions of a first instruction set are decoded and in a second mode in which program instructions of a second instruction set are decoded, a subset of program instructions of said first instruction set having a common storage order compensated encoding with a subset of program instructions of said second instruction set and forming a common subset of instructions representing at least one class of instructions, said common subset of instructions controlling said data processing logic to perform the same data processing operations independent of whether said instruction decoder is operating in said first mode or said second mode.

The invention recognises that by arranging the encoding of the instruction sets such that a common subset share the same encoding (at least after any variations due to storage order, e.g endianness, have been compensated), then such systems can be advantageously simplified in their implementation and other aspects of their operation improved. As an example, common decoding logic and/common processing logic for implementing the processing operations specified may be more readily utilised with a reduction in hardware overhead needed to support multiple instruction sets.

In preferred embodiments of the present invention the class of instructions included within the common subset of instructions (class for example being considered to be a group of instructions with similar functionality such as the load/store instructions, the multiply instructions, etc) include co-processor instructions such that the same co-processor logic can be used by both the first instruction set and the second instruction set. This is strongly advantageous since many co-processor designs exist and may have been developed for only one instruction set and the ability to reuse this same co-processor design with a further instruction set represents a significant advantage. It is particularly preferred when all co-processor instructions are within the common subset such that complete interoperability of a common group of co-processors may be provided with either instruction set.

Whilst it will be appreciated that the first instruction set and the second instruction set can have many different characteristics, preferably the first instruction set is a fixed length instruction set, conveniently of 32-bit or 16-bit instructions, and the second instruction set is a variable length instruction set.

It will be appreciated that whilst the common subset of instructions perform common data processing operations, it is not necessarily the case that these common data processing operations will always produce the same result data values. This does not detract from the hardware saving and other advantages mentioned above, but may be the result of specific peculiarities associated with certain data values to be used as input operands depending upon which instruction set is being utilised. Examples of

data values serving as input operands which may have instruction set specific peculiarities are the program counter value, which may be maintained relative to the instruction being executed to have a different value depending upon the instruction set used and/or the program status register value which may hold one or more bits indicating which instruction set is being used and accordingly have different values depending upon which instruction set is being used.

Viewed from another aspect the present invention provides a method of processing data, said method comprising the steps of:

10 performing data processing operations with data processing logic; and
decoding with an instruction decoder program instructions specifying data processing operations to be performed by said data processing logic and controlling said data processing logic to perform said data processing operations; wherein
in a first mode program instructions of a first instruction set are decoded and in
15 a second mode program instructions of a second instruction set are decoded, a subset of program instructions of said first instruction set having a common storage order compensated encoding with a subset of program instructions of said second instruction set and forming a common subset of instructions representing at least one class of instructions, said common subset of instructions controlling said data processing logic
20 to perform the same data processing operations independent of whether said instruction decoder is operating in said first mode or said second mode.

Viewed from a further aspect the present invention provides a computer program product having a computer program operable to control a data processing apparatus containing data processing logic operable to perform data processing operations, said computer program comprising:

25

program instructions of a first instruction set and program instructions of a second instruction set that control said data processing logic to perform said data processing operations; wherein
30 a subset of program instructions of said first instruction set have a common storage order compensated encoding with a subset of program instructions of said second instruction set and form a common subset of instructions representing at least one class

of instructions, said common subset of instructions controlling data processing logic to perform the same data processing operations independent of whether instructions of said first instruction set or of said second instruction set are being decoded.

5 An embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 schematically illustrates a data processing apparatus using multiple instruction sets and having an associated coprocessor;

10

Figure 2 illustrates the encoding of BL and BLX instructions in the Thumb instruction set;

Figure 3 illustrates how the encodings of 16-bit and 32-bit instructions are distinguished from each other in an enhanced version of the Thumb instruction set;

15

Figure 4 illustrates the encodings of coprocessor instructions in the ARM instruction set;

20 Figure 5 illustrates the encodings of unconditional coprocessor instructions in the enhanced version of the Thumb instruction set;

Figure 6 illustrates the difference in storage order of an unconditional CDP coprocessor instruction in the ARM instruction set and the enhanced Thumb instruction set;

25

Figure 7 illustrates a way in which instruction decoders for the ARM and Thumb instruction sets can be designed;

30 Figure 8 illustrates a second way in which instruction decoders for the ARM and Thumb instruction sets can be designed;

Figure 9 illustrates how the instruction decoders of Figure 8 are modified to decode the ARM and enhanced Thumb instruction sets; and

Figure 10 schematically illustrates the architecture of a general purpose computer which may implement program instructions in accordance with the above described techniques.

Figure 1 shows a data processing apparatus 2. The data processing apparatus 2 includes a processor core 3 containing a register bank 4, a multiplier 6, a shifter 8, an adder 10, instruction decoders 12 (including a common subset instruction decoder 13), an instruction prefetch buffer 14, an instruction prefetch unit 16 and program status registers 18. One of the registers within the register bank 4 is a program counter register 20 storing an address value having a predetermined relationship to the address value of the currently executing program instruction. This relationship can vary depending upon which instruction set is being used at the current time, e.g. current instruction address plus 4, current instruction address plus 8 etc. It will be appreciated that although only one coprocessor is shown in Figure 1, multiple coprocessors could be attached, with instructions intended for execution by different coprocessors being distinguished by a coprocessor number field in each coprocessor instruction.

A coprocessor 22 is coupled to the processor core 3 and shares instruction words and data words with the processor core 3. The coprocessor 22 is responsive to coprocessor instructions within the instruction stream fetched by the instruction prefetch unit 16.

Coprocessor instructions are executed by the processor core 3 in conjunction with the coprocessor 22. In the illustrated apparatus, the coprocessor 22 has an internal register bank and internal data processing logic. Coprocessor instructions are identified by the common subset instruction decoder 12 and passed to the coprocessor together with control signals that determine when the coprocessor instruction is to be executed.

Some coprocessor instructions read all their operands from and write all their results to the coprocessor's internal register bank, and so require no further interaction with the processor core 3. Other coprocessor instructions require data values to be passed into the coprocessor 22. Possible sources for these data values include the register bank 4, the program status registers 18 and memory (not shown). In the illustrated apparatus, the processor core 3 obtains such data values from the desired location(s) and transfers them to the coprocessor 22 via the data interface D. Yet other coprocessor instructions transfer data values produced by the coprocessor 22 to destinations external to the coprocessor 22, such as the register bank 4, the program status registers 18 and memory. In the illustrated apparatus, such data values are transferred via the data interface D to the processor core 3, which writes them to the desired destination.

It will be appreciated that many variations on this type of coprocessor operation are possible and encompassed within the present technique. For example, the coprocessor 22 might lack an internal register bank, so that its internal data processing logic always acts on data values transferred from the processor core 3 via the data interface D and sends its result values back to the processor core 3 via the data interface D. A second example is that the coprocessor 22 might have a separate interface to memory, so that it can load data values from memory and store them to memory without involving the processor core 3. In this case, the data interface D is only used for data values coming from or going to locations within the processor core 3, such as the register bank 4 and the program status registers 18. Alternatively, the data interface D could be omitted entirely, so that data values can only be transferred between the processor core 3 and the coprocessor 22 by first storing them to memory from one and then loading them from memory into the other.

It will be appreciated that in operation program instructions are fetched from memory addresses within a memory (not illustrated) and passed to the instruction prefetch buffer 14. When the program instructions reach the decode stage within the instruction prefetch buffer 14, the instruction decoders 12 decode these instructions and generates control signals which are applied to the processing logic within the

processor core 3, and the coprocessor 22 as necessary, to control these other elements to execute the data processing operation(s) specified. The processor core 3 is operable in a first mode in which a first instruction set is being decoded and in a second mode in which a second instruction set is being decoded. One way of indicating which mode the processor core 3 is in is to use a flag value within one of the program status registers 18. Depending upon which instruction set is currently active, the instruction decoders 12 will interpret the instructions received in accordance with the currently active instruction set and its encoding. In accordance with the present technique, the two instruction sets supported share a common encoding for a common subset of instructions, including at least one class of instructions, such as all unconditional coprocessor instructions, thereby enabling ready reuse of the same physical hardware to implement those common processing operations. It will be appreciated that the storage order of the program instructions from the different instruction sets may vary, such as due to endianness differences, instruction word size differences and the like, but the common subset of instructions share an encoding once such storage order differences have been compensated for as will be discussed hereafter.

In this example embodiment, the processor core 3 supports two instruction sets, the ARM instruction set and an enhanced version of the Thumb instruction set (see the ARM Architecture Reference Manual for details of the existing ARM and Thumb instruction sets). The enhancements to the Thumb instruction set include a change to its BL and BLX instructions that makes it possible to add a substantial number of 32-bit instructions.

Prior to the enhancement to the Thumb instruction set, its BL and BLX instructions consist of two successive halfwords in the instruction stream of the forms shown in Figure 2. In valid programs, instruction halfwords whose most significant five bits are 11101, 11110 or 11111 only appear in pairs of these two forms. All other instructions other than BL and BLX consist of a single halfword whose most significant five bits are in the range 00000 to 11100.

An implementation can execute the two halfwords of a BL or BLX instruction in succession, and the combined effects of executing them in this manner produce the desired effect of the BL or BLX instruction, which is to perform a subroutine call to a Thumb subroutine (for BL) or an ARM subroutine (BLX). More precisely, it is to
5 branch to a target address, switching over to the ARM instruction set if the instruction is BLX, and to place a pointer to the instruction following the second halfword in register 14, which is the subroutine link register in the ARM/Thumb instruction set architecture. The subroutine called can return by branching to this pointer.

10 Alternatively, an implementation can decode the two halfwords together as a 32-bit instruction and perform the desired effect of the BL or BLX instruction directly. In the unenhanced version of the Thumb instruction set, this is an optimisation that allows the BL or BLX instruction to be executed more efficiently, but is not essential.

15 The enhanced version of the Thumb instruction set instead requires that (under conditions to be described) two successive halfwords from the instruction stream are treated as a 32-bit instruction and not as two 16-bit halfwords to be executed in sequence with each other. Specifically, as shown in Figure 3, if the top 5 bits of the next halfword to be executed take any of the values 00000 through to 11100, it is
20 treated as a 16-bit instruction. If they take one of the values 11101, 11110 and 11111, it and the following halfword are treated together as a 32-bit instruction. All existing BL and BLX instructions are therefore required to be treated as 32-bit instructions.

25 All of the instructions of the unenhanced Thumb instruction set are still available in the enhanced version, BL and BLX as 32-bit instructions and all other instructions as 16-bit instructions. Comparing Figure 2 with Figure 3, it is apparent that only a small proportion of the available 32-bit instructions are BL and BLX instructions. The other 32-bit instructions can be used in the enhanced version to provide additional functionality not present in the unenhanced version. In particular,
30 the ARM instruction set contains many groups of instructions that are not available in the unenhanced Thumb instruction set, and the 32-bit instructions other than BL and

BLX can be used to provide Thumb equivalents of those instructions in the enhanced Thumb instruction set.

Coprocessor instructions are an example of such a group of instructions: they are present in the ARM instruction set but have no equivalents in the unenhanced version of the Thumb instruction set. ARM instructions are 32-bit words; when bits[27:24] of such an instruction take one of the values 1100, 1101 and 1110, the instruction is a coprocessor instruction. Figure 4 shows the major groups of these instructions, which are:

10

LDC instructions, which transfer data values from memory into the coprocessor;

15

STC instructions, which transfer data values from the coprocessor to memory;

MCR instructions, which transfer a data value from a processor core register into the coprocessor;

20

MCRR instructions, which transfer two data values from processor core registers into the coprocessor;

MRC instructions, which transfer a data value from the coprocessor to a processor core register;

25

MRRC instructions, which transfer two data values from the coprocessor to processor core registers;

30

CDP instructions, which perform operations within the coprocessor that do not require data values to be transferred in or out of the coprocessor;

Undefined instructions, which cause an undefined instruction exception in the processor core 3.

All of these coprocessor instructions contain a cpnum field, which identifies the coprocessor for which the instruction is intended, and a cond field. The value of cond is 1110 or 1111 for unconditional coprocessor instructions, while values in the
5 range 0000 to 1101 produce conditional versions of the equivalent instruction with cond = 1110. (The unconditional instructions with cond = 1111 do not have conditional versions.)

All of these coprocessor instructions can be executed on data processing
10 apparatus 2, using the techniques described above.

Equivalent instructions to the unconditional ARM coprocessor instructions are encoded in the enhanced Thumb instruction set as shown in Figure 5. Comparing this with Figure 4, and noting that cond = 1110 or 1111 for unconditional ARM
15 instructions, it will be appreciated that the encoding of each unconditional Thumb coprocessor instruction is identical to that of the equivalent ARM coprocessor instruction apart from storage order considerations. Furthermore, all of these unconditional Thumb coprocessor instructions have encodings in which HW1[15:11] = 11101 or 11111, and so are 32-bit instructions according to the rule illustrated in
20 Figure 3.

The storage order considerations arise from the fact that ARM instruction words and Thumb instruction halfwords are normally stored in little-endian order, i.e. with their least significant byte at the lowest memory address. As an example, an
25 ARM unconditional CDP instruction whose memory address is A will be held in the four bytes at addresses A, A+1, A+2 and A+3 as shown on the left hand side of Figure 6. The equivalent instruction in the enhanced Thumb instruction set will be held with the first halfword HW1 at address A and the second halfword HW2 at address A+2, and so will result in the instruction being held in the four bytes as shown on the right
30 hand side of Figure 6. Comparing the two sides, the Thumb instruction consists of the same bytes as the ARM instruction, but in a different storage order: the bytes at addresses A and A+2 are swapped over relative to each other, as are the bytes at

addresses A+1 and A+3. It will be appreciated that the same difference in storage order will exist for all of the unconditional coprocessor instructions, regardless of the precise instruction type.

5 The enhanced Thumb instruction set is a variable-length instruction set, containing both 16-bit and 32-bit instructions. The first step in decoding such an instruction set is to identify the individual instructions in the instruction prefetch buffer 14. In this embodiment, each entry in the instruction prefetch buffer 14 is a word-aligned word previously fetched from memory by the instruction prefetch unit 16.
10 Denoting the entry at the head of the buffer as WORD1 and the next entry as WORD2, the instructions passed to the instruction decoders 12 are determined by the following rules:

Current instruction set	Instruction address mod 4	WORD1 [15:11]	WORD1 [31:26]	Instruction sent to decoder	
				bits[31:16]	bits[15:0]
ARM	Always 0	any	any	WORD1 [31:16]	WORD1 [15:0]
Thumb	0	00000-11100	any	0	WORD1 [15:0]
Thumb	0	11101-11111	any	WORD1 [15:0]	WORD1 [31:16]
Thumb	2	any	00000-11100	0	WORD1 [31:16]
Thumb	2	any	11101-11111	WORD1 [31:16]	WORD2 [15:0]

This sends the correct instruction to the instruction decoder 12, with the storage order compensated for. It is always sent as 32 bits, with the most significant 16 bits being zero for a 16-bit Thumb instruction. It will be appreciated that for the Thumb instruction set, no separate bit is required to tell the instruction decoder 12 whether the instruction is a 16-bit instruction or a 32-bit instruction: the most significant bit of the 32 bits sent to the instruction decoder 12 is always 0 for a 16-bit instruction and 1 for a 32-bit instruction.

35

It will be appreciated that processor core implementations vary considerably as regards how they prefetch instructions and how many instructions they decode at a

time, and therefore that this method of identifying the individual instructions will need to be modified according to these and other aspects of the processor core implementation.

5 There are two common existing ways to implement the instruction decoders 12 so that they can handle both the ARM and the Thumb instruction sets. In one, illustrated in Figure 7, a Thumb-to-ARM converter contains logic that converts each Thumb instruction into the corresponding ARM instruction. Multiplexors select the original instruction if ARM code is being executed, or the converted instruction if
10 Thumb code is being executed. The output of the multiplexors is then decoded by an ARM decoder.

 This form of the instruction decoders 12 can be modified to decode the unconditional coprocessor instructions that have been included in the enhanced Thumb
15 instruction set, by making the Thumb-to-ARM converter pass the original instruction through unchanged to the multiplexor if bits[27:24] of the original instruction were 1100, 1101 or 1110 (these bits will always be 0000 for a 16-bit Thumb instruction, and some value other than 1100, 1101 or 1110 for a non-coprocessor 32-bit Thumb instruction). It will be appreciated that the enhanced Thumb instruction set may
20 contain further 32-bit instructions besides BL, BLX and the unconditional coprocessor instructions; if it does, then further modifications will also be made to the Thumb-to-ARM converter to handle those instructions.

 The second common existing way to implement the instruction decoders 12 is
25 to use separate decoders for the ARM and Thumb instruction sets, as illustrated in Figure 8. Multiplexors are then used to select the outputs of the ARM decoder if ARM code is being executed, or the outputs of the Thumb decoder if Thumb code is being
 executed.

30 This form of the instruction decoders 12 can be modified to decode the unconditional coprocessor instructions by splitting the ARM decoder into a part that decodes coprocessor instructions and a part that decodes non-coprocessor ARM

instructions, as illustrated in Figure 9. If the enhanced Thumb instruction set contains further 32-bit instructions besides BL, BLX and the unconditional coprocessor instructions, the non-coprocessor Thumb decoder is modified to handle them. The final multiplexors then select the outputs of the coprocessor decoder if bits[27:24] of the instruction are 1100, 1101 or 1110; otherwise, they select the outputs of the non-coprocessor ARM decoder if ARM code is being executed, or the outputs of the non-coprocessor Thumb decoder if Thumb code is being executed.

In the first form of the instruction decoders 12, the common subset instruction decoder 13 is the part of the ARM decoder that decodes coprocessor instructions. In the second form, it is the coprocessor decoder.

The use of a common storage order compensated encoding for the unconditional coprocessor instructions in the ARM and enhanced Thumb instruction sets has considerable advantages for both forms of the instruction decoders 12 compared with the use of different encodings in each instruction set, in terms of reducing the amount of logic required and the amount of power consumed. A further advantage is that the coprocessor 22 only needs to be able to execute the same instructions as it could before the enhancement to the Thumb instruction set. As well as avoiding increases in the logic required by coprocessors and the power they consume, this also means that existing coprocessors do not need to be modified to be usable from the enhanced Thumb instruction set.

It will be appreciated that the technique described above can be modified to perform the storage order compensation at other places within the design, such as within the Thumb-to-ARM converter in Figure 7, and that like any other logical design, it can be transformed into many logically equivalent designs. The present technique encompasses all such modifications and transformations.

Figure 10 schematically illustrates a general purpose computer 200 which may implement program instructions in accordance with the above described techniques. The general purpose computer 200 includes a central processing unit 202, a random

access memory 204, a read only memory 206, a network interface card 208, a hard disk drive 210, a display driver 212 and monitor 214 and a user input/output circuit 216 with a keyboard 218 and mouse 220 all connected via a common bus 222. In operation the central processing unit 202 will execute computer program instructions that may be stored in one or more of the random access memory 204, the read only memory 206 and the hard disk drive 210 or dynamically downloaded via the network interface card 208. The results of the processing performed may be displayed to a user via the display driver 212 and the monitor 214. User inputs for controlling the operation of the general purpose computer 200 may be received via the user input output circuit 216 from the keyboard 218 or the mouse 220. It will be appreciated that the computer program could be written in a variety of different computer languages. The computer program may be stored and distributed on a recording medium or dynamically downloaded to the general purpose computer 200. When operating under control of an appropriate computer program, the general purpose computer 200 can perform the above described techniques and can be considered to form an apparatus for performing the above described technique. The architecture of the general purpose computer 200 could vary considerably and Figure 10 is only one example.

CLAIMS

1. Apparatus for processing data, said apparatus comprising:
data processing logic operable to perform data processing operations; and
5 an instruction decoder operable to decode program instructions specifying data processing operations to be performed by said data processing logic and to control said data processing logic to perform said data processing operations; wherein
said instruction decoder is operable in a first mode in which program instructions of a first instruction set are decoded and in a second mode in which
10 program instructions of a second instruction set are decoded, a subset of program instructions of said first instruction set having a common storage order compensated encoding with a subset of program instructions of said second instruction set and forming a common subset of instructions representing at least one class of instructions, said common subset of instructions controlling said data processing logic to perform
15 the same data processing operations independent of whether said instruction decoder is operating in said first mode or said second mode.
2. Apparatus as claimed in claim 1, wherein said instruction decoder is operable to use common portions of said data processing logic to execute instructions of said
20 common subset of instructions.
3. Apparatus as claimed in any one of claims 1 and 2, wherein said common subset of instructions includes a class of instructions being coprocessor instructions operable to control coprocessor data processing operations using coprocessor logic
25 common to said first instruction set and said second instruction set.
4. Apparatus as claimed in claim 3, wherein all unconditional coprocessor instructions are within said common subset.
- 30 5. Apparatus as claimed in any one of the preceding claims, wherein said first instruction set is a fixed length instruction set of N-bit instructions.

6. Apparatus as claimed in claim 5, wherein N is one of 32 or 16.
7. Apparatus as claimed in any one of the preceding claims, wherein said second
5 instruction set is a variable length instruction set.
8. Apparatus as claimed in any one of the preceding claims, wherein at least one
program instruction within said common subset of instructions performs common data
processing operations in either said first mode or said second mode but generates
10 different result data values depending upon whether said instruction decoder is
operating in said first mode or said second mode.
9. Apparatus as claimed in claim 8, wherein said at least one program instruction
generating different result data values includes a program counter value as an input
15 operand.
10. Apparatus as claimed in claim 9, wherein a different relationship is maintained
between said program counter value and an address of an instruction being executed
depending upon whether said instruction decoder is operating in said first mode or said
20 second mode.
11. Apparatus as claimed in claim 8, wherein said at least one program instruction
generating different result data values includes a program status register value as an
input operand.
25
12. A method of processing data, said method comprising the steps of:
performing data processing operations with data processing logic; and
decoding with an instruction decoder program instructions specifying data
processing operations to be performed by said data processing logic and controlling
30 said data processing logic to perform said data processing operations; wherein
in a first mode program instructions of a first instruction set are decoded and in
a second mode program instructions of a second instruction set are decoded, a subset

of program instructions of said first instruction set having a common storage order compensated encoding with a subset of program instructions of said second instruction set and forming a common subset of instructions representing at least one class of instructions, said common subset of instructions controlling said data processing logic to perform the same data processing operations independent of whether said instruction decoder is operating in said first mode or said second mode.

13. A method as claimed in claim 12, wherein common portions of said data processing logic are used to execute instructions of said common subset of instructions.

14. A method as claimed in any one of claims 12 and 13, wherein said common subset of instructions includes a class of instructions being coprocessor instructions operable to control coprocessor data processing operations using coprocessor logic common to said first instruction set and said second instruction set.

15. A method as claimed in claim 14, wherein all unconditional coprocessor instructions are within said common subset.

16. A method as claimed in any one of claims 12 to 15, wherein said first instruction set is a fixed length instruction set of N-bit instructions.

17. A method as claimed in claim 16, wherein N is one of 32 or 16.

18. A method as claimed in any one of claims 12 to 17, wherein said second instruction set is a variable length instruction set.

19. A method as claimed in any one of claims 12 to 18, wherein at least one program instruction within said common subset of instructions performs common data processing operations in either said first mode or said second mode but generates

different result data values depending upon whether said instruction decoder is operating in said first mode or said second mode.

20. A method as claimed in claim 19, wherein said at least one program instruction
5 generating different result data values includes a program counter value as an input operand.

21. A method as claimed in claim 20, wherein a different relationship is maintained
10 between said program counter value and an address of an instruction being executed depending upon whether said instruction decoder is operating in said first mode or said second mode.

22. A method as claimed in claim 19, wherein said at least one program instruction
15 generating different result data values includes a program status register value as an input operand.

23. A computer program product having a computer program operable to control a data processing apparatus containing data processing logic operable to perform data processing operations, said computer program comprising:

20 program instructions of a first instruction set and program instructions of a second instruction set, that control said data processing logic to perform said data processing operations; wherein

a subset of program instructions of said first instruction set have a common storage order compensated encoding with a subset of program instructions of said second
25 instruction set and form a common subset of instructions representing at least one class of instructions, said common subset of instructions controlling data processing logic to perform the same data processing operations independent of whether instructions of said first instruction set or of said second instruction set are being decoded.

24. A computer program product as claimed in claim 23, wherein common portions of said data processing logic are used to execute instructions of said common subset of instructions.

5 25. A computer program product as claimed in any one of claims 23 and 24, wherein said common subset of instructions includes a class of instructions being coprocessor instructions operable to control coprocessor data processing operations using coprocessor logic common to said first instruction set and said second instruction set.

10

26. A computer program product as claimed in claim 25, wherein all unconditional coprocessor instructions are within said common subset.

15 27. A computer program product as claimed in any one of claims 23 to 26, wherein said first instruction set is a fixed length instruction set of N-bit instructions.

28. A computer program product as claimed in claim 27, wherein N is one of 32 or 16.

20 29. A computer program product as claimed in any one of claims 23 to 28, wherein said second instruction set is a variable length instruction set.

25 30. A computer program product as claimed in any one of claims 23 to 29, wherein at least one program instruction within said common subset of instructions performs common data processing operations when instructions of either said first instruction set or said second instruction set are being decoded but generates different result data values.

30 31. A computer program product as claimed in claim 30, wherein said at least one program instruction generating different result data values includes a program counter value as an input operand.

32. A computer program product as claimed in claim 31, wherein a different relationship is maintained between said program counter value and an address of an instruction being executed depending upon whether said instruction decoder is
5 operating in said first mode or said second mode.

33. A computer program product as claimed in claim 30, wherein said at least one program instruction generating different result data values includes a program status register value as an input operand.

10

34. Apparatus for processing data substantially as hereinbefore described with reference to the accompanying drawings.

35. A method of processing data substantially as hereinbefore described with
15 reference to the accompanying drawings.

36. A computer program product data substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACT

**INSTRUCTION ENCODING WITHIN A DATA PROCESSING APPARATUS
HAVING MULTIPLE INSTRUCTION SETS**

5 A data processing apparatus 2 is provided which supports two instruction sets. These two instruction sets share a common subset of instructions including at least one class of instructions, such as all of the coprocessor instructions. The common subset of instructions have the same instruction encoding once any differences due to storage order within memory have been compensated for e.g. endianness.

10


[Figure 1]

THIS PAGE BLANK (USPTO)

2

17

Fig. 1

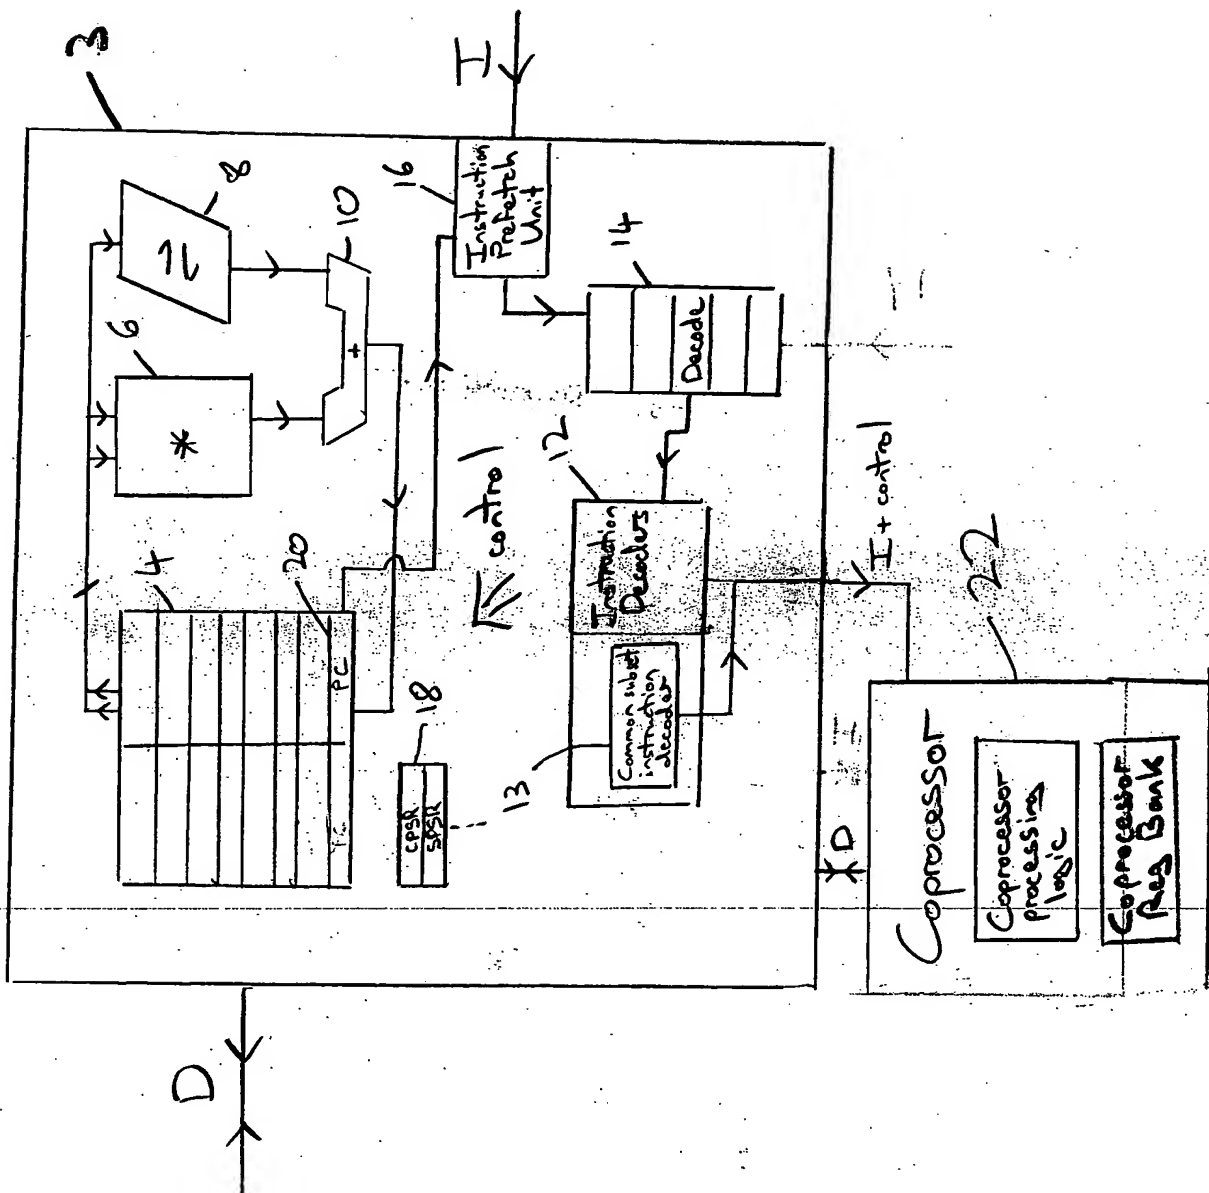

THIS PAGE BLANK (USPTO)

2/7

FIGURE 2 (PRIOR ART):

BL instruction:

First halfword (HW1)				Second halfword (HW2)			
15	11	10	0	15	11	10	0
+-----+				+-----+			
11110 xxxxxxxxxxxx				11101 xxxxxxxxxxxx			
+-----+				+-----+			

BLX instruction:

First halfword (HW1)				Second halfword (HW2)			
15	11	10	0	15	11	10	0
+-----+				+-----+			
11110 xxxxxxxxxxxx				11111 xxxxxxxxxxxx0			
+-----+				+-----+			

FIGURE 3:

16-bit instruction if ABCDE is in range 00000 to 11100:

First/only halfword			
15	11	10	0
+-----+			
ABCDE xxxxxxxxxxxx			
+-----+			

32-bit instruction if ABCDE is 11101, 11110 or 11111:

First halfword (HW1)				Second halfword (HW2)			
15	11	10	0	15			0
+-----+				+-----+			
ABCDE xxxxxxxxxxxx				xxxxxxxxxxxxxxxxxxxx			
+-----+				+-----+			

THIS PAGE BLANK (USPTO)

3/7

FIGURE 4-(PRIOR ART):

ARM coprocessor instructions with bits[27:24] = 1100 or 1101:

	31	28	27	25	24	23	22	21	20	19	16	15	12	11	8	7	4	3	0	
Undefined	cond	110	0	0	0	0	0	x	xxxx	xxxx	cpnum	xxxxxxxx								
	cond	110	0	0	1	0	0	Rn	Rd	cpnum	opc	CRm	MCRR							
	cond	110	0	0	1	0	1	Rn	Rd	cpnum	opc	CRm	MRRC							
	cond	110	P	U	N	W	0	Rn	CRd	cpnum	offset	STC								
	cond	110	P	U	N	W	1	Rn	CRd	cpnum	offset	LDC								

Note: (P,U,W) != (0,0,0) on the LDC and STC rows.

ARM coprocessor instructions with bits[27:24] = 1110:

	31	28	27	24	23	21	20	19	16	15	12	11	8	7	5	4	3	0	
	cond	1110	opc1			CRn	CRd	cpnum	opc2	0	CRm	CDP							
	cond	1110	opc1	0		CRn	Rd	cpnum	opc2	1	CRm	MCR							
	cond	1110	opc1	1		CRn	Rd	cpnum	opc2	1	CRm	MRC							

THIS PAGE BLANK (USPTO)

FIGURE 5:

Coprocessor instructions in the enhanced Thumb instruction set:

With HW1[11:8] = 1100 or 1101:

First halfword (HW1)										Second halfword (HW2)								
15	12	11	9	8	7	6	5	4	3	0	15	12	11	8	7	4	3	0
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+										+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
111x 110 0 0 0 0 x xxxx										xxxx cpnum xxxxxxxx								
Undefined																		
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+										+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
111x 110 0 0 1 0 0 0 Rn										Rd cpnum opc CRm MCRR								
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+										+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
111x 110 0 0 1 0 1 Rn										Rd cpnum opc CRm MRRC								
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+										+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
111x 110 P U N W 0 Rn										CRd cpnum offset STC								
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+										+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
111x 110 P U N W 1 Rn										CRd cpnum offset LDC								
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+										+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								

Note: (P,U,W) != (0,0,0) on the LDC and STC rows.

With HW1[11:8] = 1110:

First halfword (HW1)									Second halfword (HW2)									
15	12	11	8	7	5	4	3	0	15	12	11	8	7	5	4	3	0	
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									
111x 1110 opc1 CRn									CRd cpnum opc2 0 CRm									CDP
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									
111x 1110 opc1 0 CRn									Rd cpnum opc2 1 CRm									MCR
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									
111x 1110 opc1 1 CRn									Rd cpnum opc2 1 CRm									MRC
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+									

FIGURE 6:

ARM unconditional CDP instruction					Byte address	Thumb unconditional CDP instruction				
7	5	4	3	0		7	5	4	3	0
+-----+-----+-----+-----+					A	+-----+-----+-----+-----+				
opc2 0 CRm						opc1 CRn				
+-----+-----+-----+-----+					A+1	+-----+-----+-----+-----+				
CRd cpnum						111x1110				
+-----+-----+-----+-----+					A+2	+-----+-----+-----+-----+				
opc1 CRn						opc2 0 CRm				
+-----+-----+-----+-----+					A+3	+-----+-----+-----+-----+				
111x1110						CRd cpnum				
+-----+-----+-----+-----+						+-----+-----+-----+-----+				

THIS PAGE BLANK (USPTO)

FIGURE 7-(PRIOR ART):


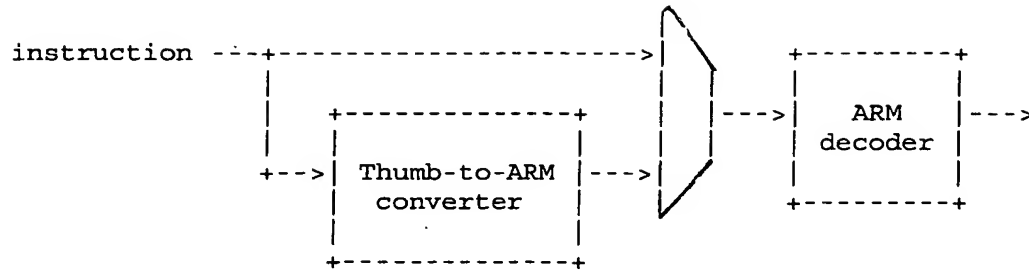



FIGURE 8 (PRIOR ART):

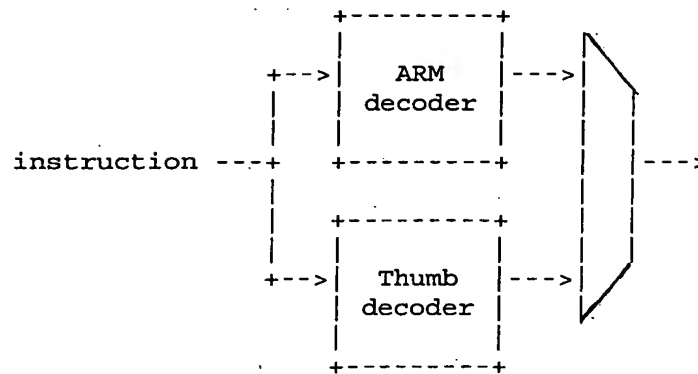

THIS PAGE BLANK (USPTO)

6/7

FIGURE 9:-

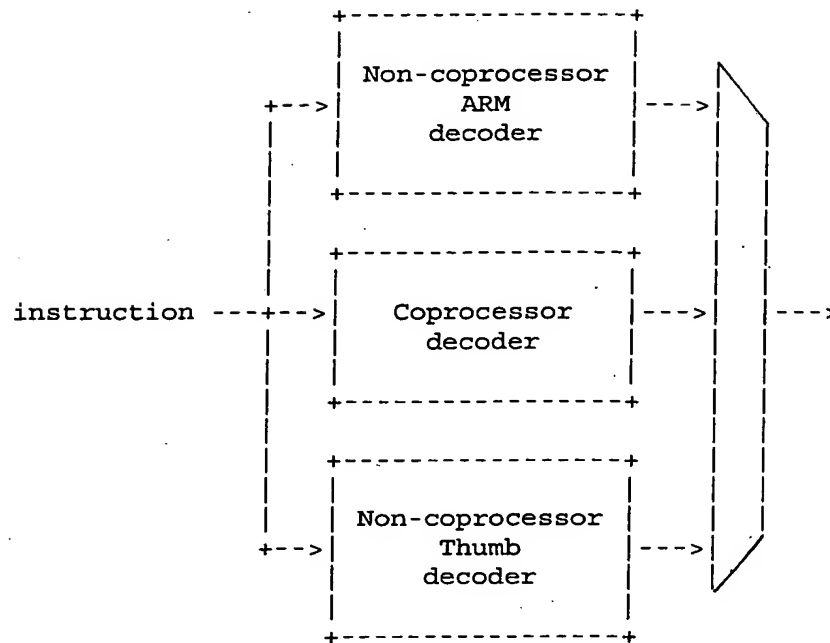

THIS PAGE BLANK (USPTO)

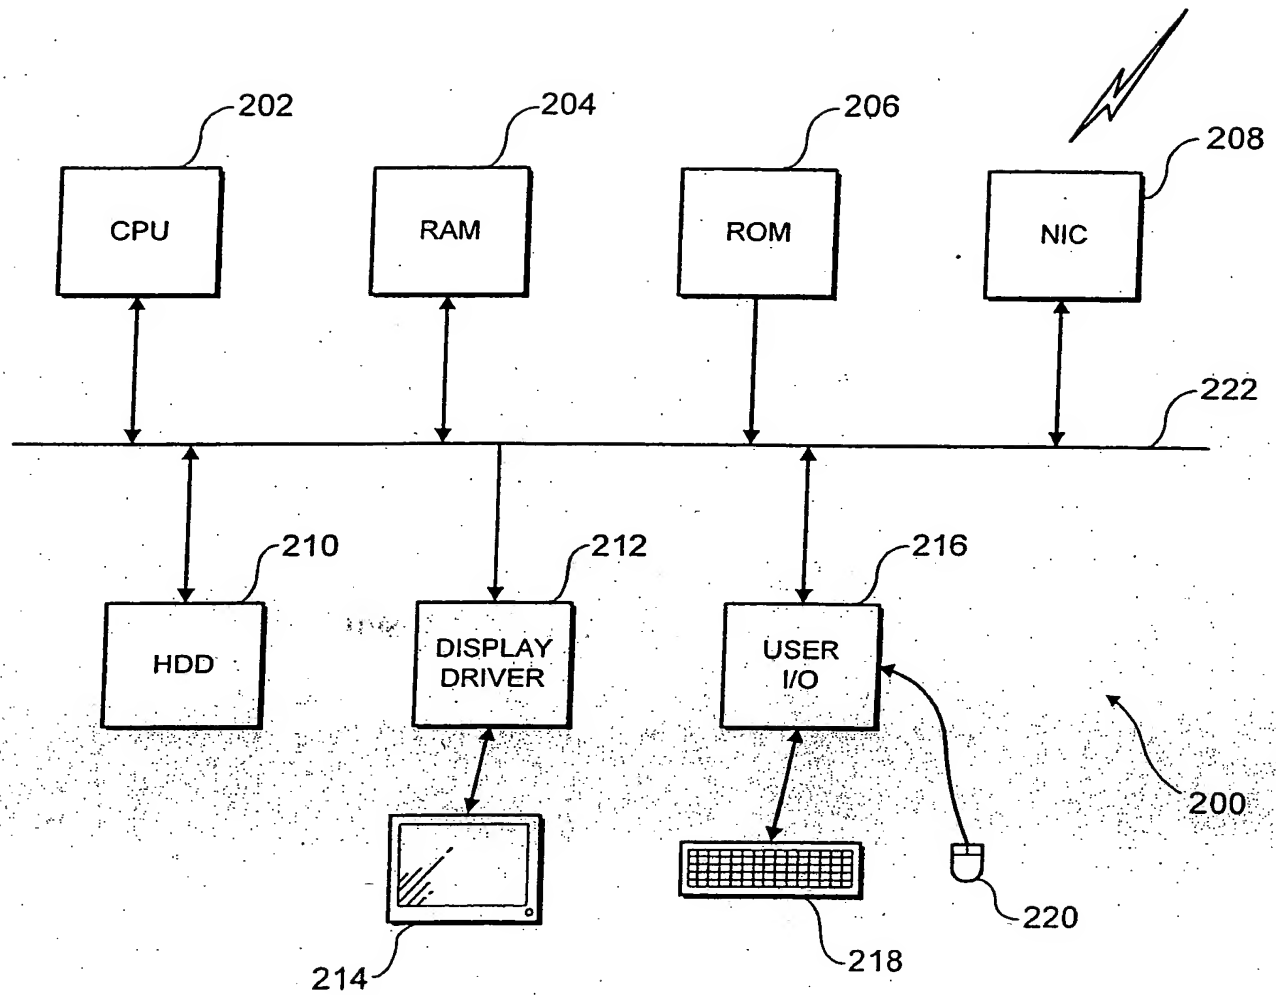


FIG. 10

THIS PAGE BLANK (USPTO)